

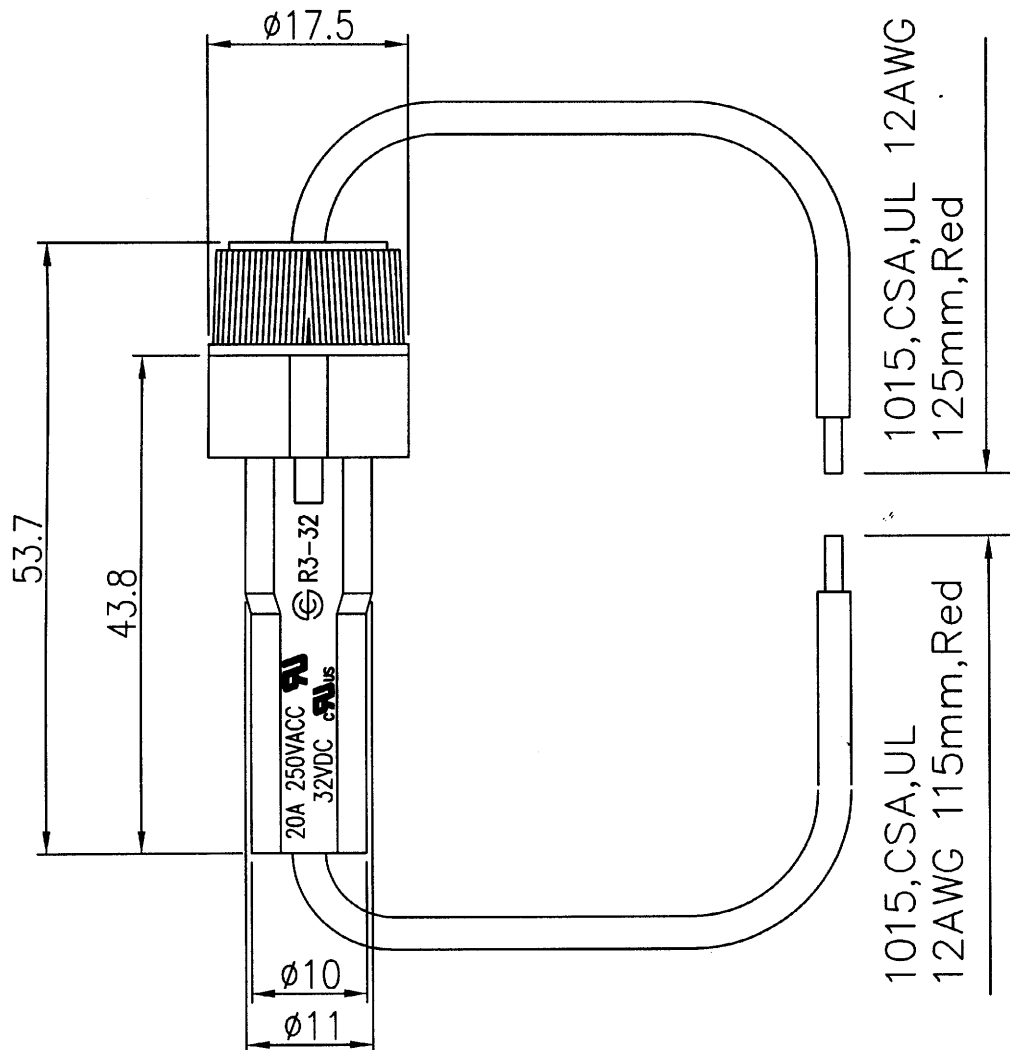




Rating	20A 32VDC  20A 250VAC 
Insulation R	DC 500V 100M ohm Min.
Voltage Breakdown	AC 1000V 1 minute
Fuse Size	ø5.2*20mm

No Fuse



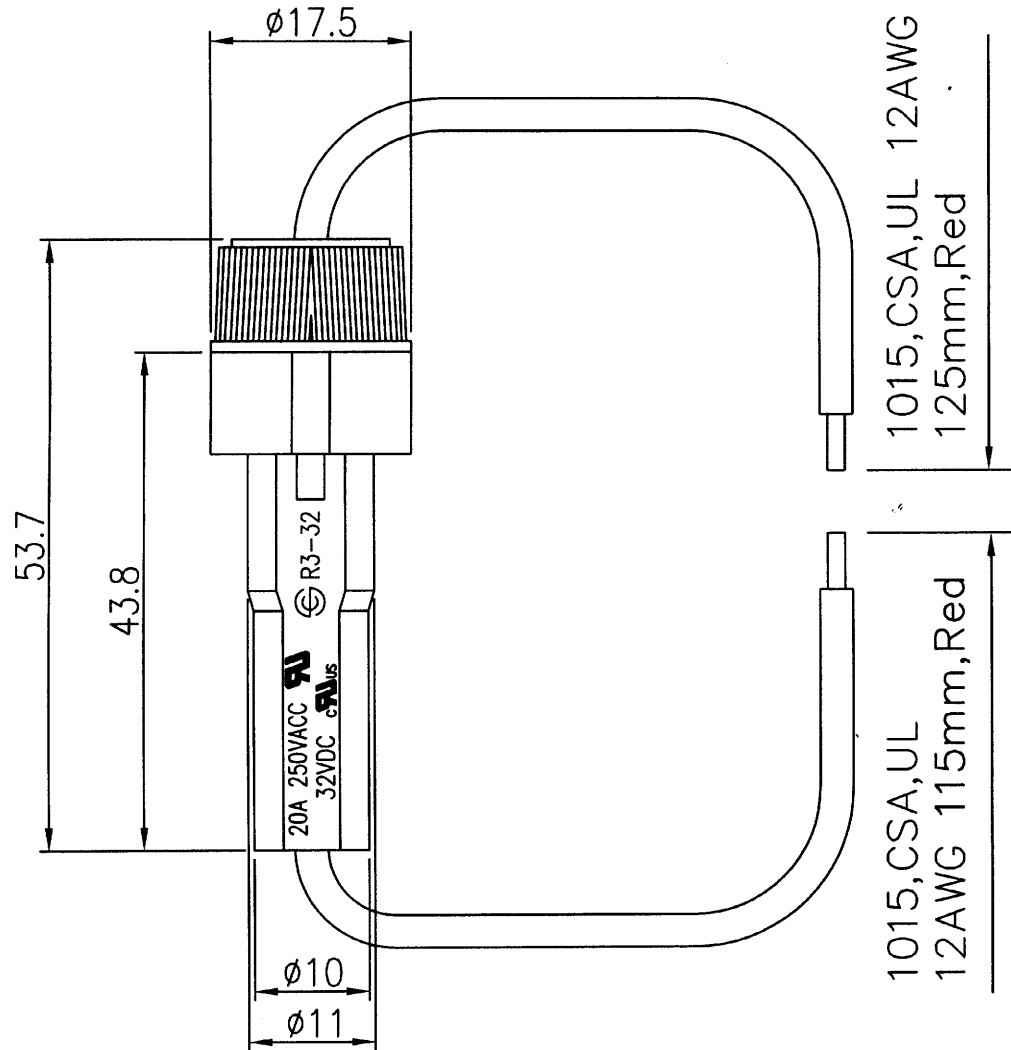
TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

D:\Ruby\Projects\■■■\R1~R10

							△
							△
<b>Date</b>	<b>Name</b>	<b>Descriptions</b>					<b>NO</b>
<b>Drawing</b>	<b>Check</b>	<b>Approval</b>	<b>SCI No.</b>	1310283	<b>Model Name</b>	FUSE HOLDER	
徐洲迎			<b>Customer No.</b>		<b>Model No.</b>	R3-32A1	
9/18/06	9/18/06		<b>Unit</b>	mm			

Rating	20A 32VDC cRU <sub>US</sub> 20A 250VAC RU
Insulation R	DC 500V 100M ohm Min.
Voltage Breakdown	AC 1000V 1 minute
Fuse Size	ø6.0*30mm ø6.3*32mm

No Fuse



TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

D:\Ruby\Projects\■■\R1~R10

							△
							△
<b>Date</b>	<b>Name</b>	<b>Descriptions</b>					<b>NO</b>
<b>Drawing</b>	<b>Check</b>	<b>Approval</b>	<b>SCI No.</b>	1310284	<b>Model Name</b>	FUSE HOLDER	
徐洲迎	<i>[Signature]</i>		<b>Customer No.</b>		<b>Model No.</b>	R3-32B1	
9/15/'06	9/18-'06		<b>Unit</b>	mm	SHIN CHIN INDUSTRIAL CO., LTD.		